

**English** Installation Instructions

**Power Tilt Plasma/LCD Wall Mount D3012010**



**Features:**

- Integrated Bubble Level
- Durable Steel Construction
- Easy 2 Piece Mounting
- Remotely Tilts down (up to 15 degrees)
- Locking Lever
- Stud Finder Included

**Mounting Equipment Included:**

Bag	REF	Description	QTY
1	A	Phillips M4 x 12 Bolt	4
	B	Phillips M4 x 20 Bolt	4
	C	Phillips M4 x 30 Bolt	4
2	D	Phillips M5 x 12 Bolt	4
	E	Phillips M5 x 20 Bolt	4
	F	Phillips M4 x 30 Bolt	4
3	G	Phillips M6 x 12 Bolt	4
	H	Phillips M6 x 24 Bolt	4
	I	Phillips M4 x 35 Bolt	4
4	J	Phillips M8 x 25 Bolt	4
	K	Phillips M8 x 40 Bolt	4
5	L	M4/M5 Washer	4
	M	M4/M5 Spacer	4
5	N	M6/M8 Spacer	4
1	O	M4 Lock Washer	4
2	P	M5 Lock Washer	4
3	Q	M6 Lock Washer	4
4	R	M8 Lock Washer	4
6	S	3" Hex Screw	6
	T	Hex Washer	6
	U	Concrete Anchor	6
7	V	Hex Wrench	1
	W	M5 x 48 Bolt	8
	X	M5 Hex Nut	8
	Y	M5 Washer	8

**Tools required for attachment to stud:**

- 1/2" (12mm) Socket Wrench (Included)
- Stud finder (Included)



**Tools required for attaching to concrete:**

- Electric drill
- 1/2" (12mm) Masonry Bit

**1 DETERMINE CORRECT BOLT**

**Caution:** Carefully thread the bolt into the back of your LCD to determine which bolt is to be used. If there is any resistance remove the bolt immediately.

**2 ATTACH TO TV**

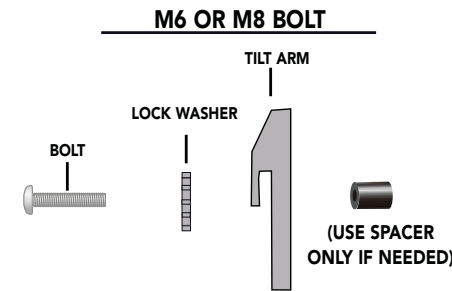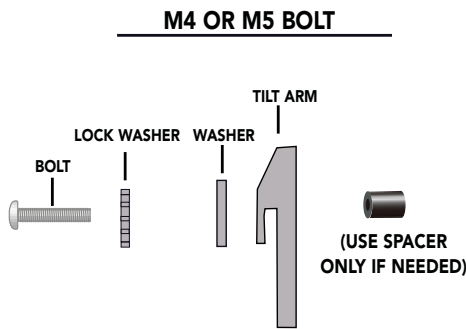

**3a ATTACH TV TO WOOD STUDS**



**NOTE:** Due to the weight of the LCD/Plasma TV's, it is necessary to mount the Wall Plate to at least 2 studs.




Locate stud with Stud Finder  
(See manual included)




**3b ATTACH TV TO CONCRETE**

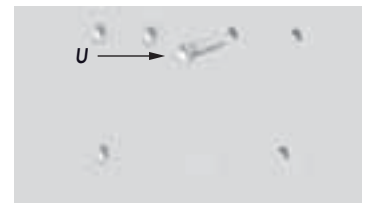
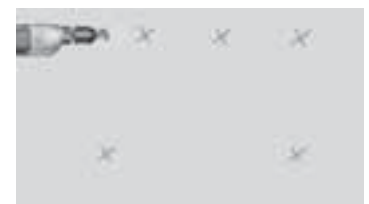


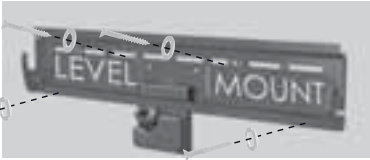


**4 SLIDE TOGETHER**

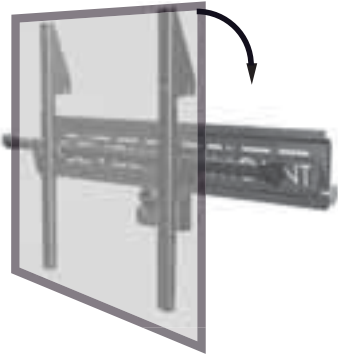

**TILTING THE DISPLAY**

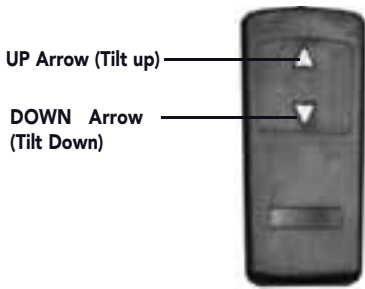

**ATTACHING CORD MANAGEMENT**

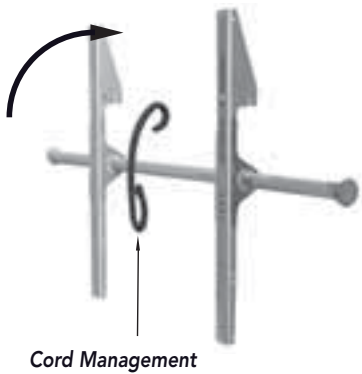

**LOCKING THE DISPLAY**



**ATTACHING EXTENSION ARMS**

